



GE Fanuc Intelligent Platforms

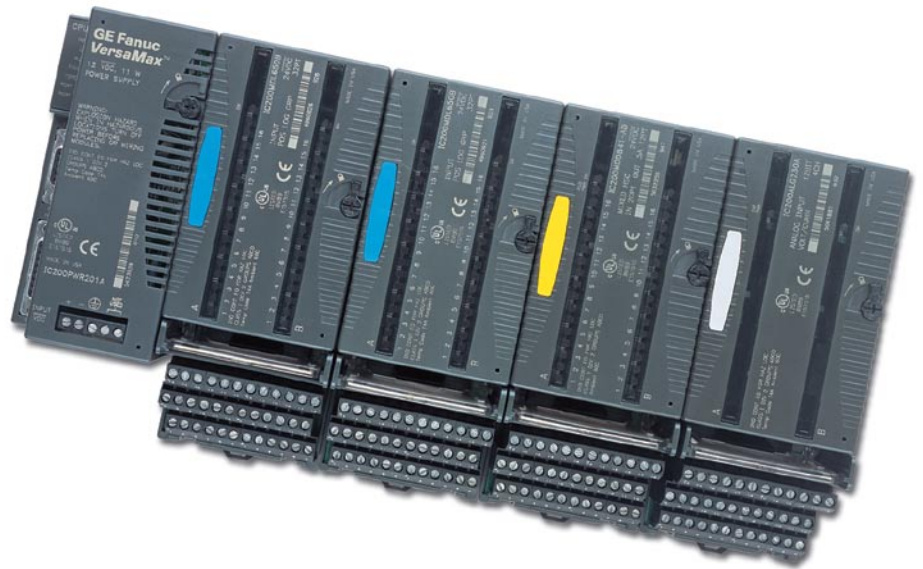

VersaMax* I/O and Control

Maximum versatility is the guiding principle behind VersaMax* from GE Fanuc Intelligent Platforms. This compact, extremely affordable control solution can be used as a PLC, as I/O, and as distributed control. With its modular and scalable architecture, intuitive features and ease of use, this innovative control family can save machine builders and end users considerable time and money.

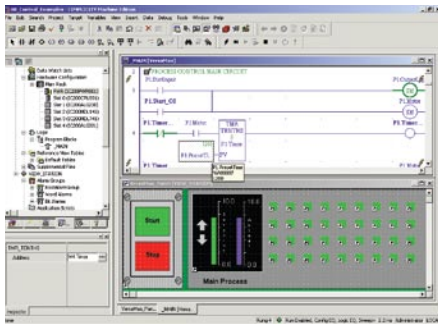

Offering Big PLC Power in a Small Package.

VersaMax CPUs supply a number of features usually found only in PLCs with larger footprints, including up to 64k of memory for application programs, floating point math, real-time clock, subroutines, PID control, flash memory, and bumpless program store. The serial ports support serial read/write and Modbus master/slave communications.

An Abundance of Useful I/O Options.

GE Fanuc offers a broad range of discrete, analog, mixed, and specialty I/O modules. These modules can be freely combined to create stand-alone I/O stations with up to 256 I/O points and expanded I/O systems with up to 4,096 I/O points.

The Perfect Match for Today's Open Systems.

VersaMax gives you the freedom to connect to a wide variety of host controllers, including PLC, DCS and PC-based control systems by way of Genius*, DeviceNet™, Profibus-DP™ and Ethernet networks. VersaMax also fully supports the power and open architecture of GE Fanuc's PC Control solutions.

The Ultimate in Cost-effective Control and I/O.

With intuitive diagnostics, hot insertion of modules and quick connect wiring, VersaMax extends uptime, reduces engineering and training needs, and dramatically reduces project life-cycle costs.

A Design that Maximizes Ease of Use.

Every aspect of VersaMax has been carefully refined to accommodate the user. Snap-together I/O carriers mean that no tools are required for module installation or extraction. A convenient rotary switch can be used for setting bus addresses, reducing programming time. With VersaMax, you can even address I/O automatically.

Easy Trouble Shooting and Machine Setup Using a Handheld PDA.

Proficy* Machine Edition Logic Developer PDA software allows you to interface a Palm® handheld device to your VersaMax controller. With Logic Developer PDA, you can monitor/change data, view diagnostics, force ON/OFF, and configure machine setup — saving you time and increasing productivity.



Ordering Information

Description	Catalog Number		Catalog Number		
Discrete Input Modules ¹	IC200MDL140	Input 120 VAC (1 Group of 8) 8 Points	IC200MDL631	Input 125 VDC Pos/Neg Logic Isolated 8 Points	
	IC200MDL141	Input 240 VAC (1 Group of 8) 8 Points	IC200MDL632	Input 125 VDC Pos/Neg Logic Isolated 16 Points	
	IC200MDL143	Input 120 VAC Isolated 8 Points	IC200MDL635	Input 48 VDC Pos/Neg Logic (2 Groups of 8) 16 Points	
	IC200MDL144	Input 240 VAC Isolated 4 Points	IC200MDL636	Input 48 VDC Pos/Neg Logic (4 Groups of 8) 32 Points	
	IC200MDL240	Input 120 VAC (2 Groups of 8) 16 Points	IC200MDL640	Input 24 VDC Pos/Neg Logic (2 Groups of 8) 16 Points	
	IC200MDL241	Input 240 VAC (2 Groups of 8) 16 Points	IC200MDL643	Input 5/12 VDC Pos/Neg Logic (2 Groups of 8) 16 Points	
	IC200MDL243	Input 120 VAC Isolated 16 Points	IC200MDL644	Input 5/12 VDC Pos/Neg Logic (4 Groups of 8) 32 Points	
	IC200MDL244	Input 240 VAC Isolated 8 Points	IC200MDL650	Input 24 VDC Pos/Neg Logic (4 Groups of 8) 32 Points	
	Discrete Output Modules ¹	IC200MDL329	Output 120 VAC 0.5 Amp per Point Isolated 8 Points	IC200MDL741	Output 24 VDC Pos Logic 0.5 Amp per Point with ESCP 16 Points
IC200MDL330		Output 120 VAC 0.5 Amp per Point Isolated 16 Points	IC200MDL742	Output 24 VDC Pos Logic 0.5 Amp per Point with ESCP 32 Points	
IC200MDL331		Output 120 VAC 2.0 Amp per Point Isolated 8 Points	IC200MDL743	Output 5/12/24 VDC Neg Logic 0.5 Amp per Point 16 Points	
IC200MDL730		Output 24 VDC Pos Logic 2.0 Amp per Point with ESCP 8 Points	IC200MDL744	Output 5/12/24 VDC Neg Logic 0.5 Amp per Point 32 Points	
IC200MDL740		Output 12/24 VDC Pos Logic 0.5 Amp per Point 16 Points	IC200MDL750	Output 12/24 VDC Pos Logic 0.5 Amp per Point 32 Points	
IC200MDL930		Output Relay 2.0 Amp per Point Isolated Form A 8 Points	IC200MDL940	Output Relay 2.0 Amp per Point Isolated Form A 16 Points	
Mixed Discrete Modules ¹		IC200MDD840	Mixed 24 VDC Pos Logic Input Grouped 20 Points / Output Relay 2.0 Amp per Point Grouped 12 Points	IC200MDD846	Mixed Output Relay 2.0 Amp per Point Isolated 8 Points / Input 120 VAC Grouped 8 Points
		IC200MDD841	Mixed 24 VDC Pos Logic Input Grouped 20 Points / Output Grouped 12 Points/HSC/PWM/PT	IC200MDD847	Mixed Output Relay 2.0 Amp per Point Isolated 8 Points / Input 240 VAC Grouped 8 Points
	IC200MDD842	Mixed 24 VDC Pos Logic Output 0.5 Amp Grouped with ESCP 16 Points / Input Grouped 16 Points	IC200MDD848	Mixed Output 120 VAC 0.5 Amp per Point Isolated 8 Points / Input 120 VAC Grouped 8 Points	
	IC200MDD843	Mixed 24 VDC Pos Logic Input Grouped 10 Points / Output Relay 2.0 Amp per Point Grouped 6 Points	IC200MDD849	Mixed Output Relay 2.0 Amp per Point Isolated 8 Points / Input 120 VAC Isolated 8 Points	
	IC200MDD844	Mixed 24 VDC Pos Logic Output 0.5 Amp Grouped 16 Points / Input Grouped 16 Points	IC200MDD850	Mixed Output Relay 2.0 Amp per Point Isolated 8 Points / Input 240 VAC Isolated 4 Points	
	IC200MDD845	Mixed Output Relay 2.0 Amp per Point Isolated 8 Points / Input 24 VDC Pos Logic Grouped 16 Points	IC200MDD851	Mixed 12/24 VDC Pos Logic Output 0.5 Amp per Point Grouped 16 Points/ Input 5/12 VDC Pos/Neg Logic Grouped 16 PT	
	Analog Input Modules ¹	IC200ALG230	Analog Input 12 Bit Voltage/Current 4 Channels	IC200ALG263 ⁵	Analog Input 15 Bit Voltage 15 Channels
IC200ALG240		Analog Input 16 Bit Voltage/Current Isolated 8 Channels	IC200ALG264 ⁵	Analog Input 15 Bit Current 15 Channels	
IC200ALG260		Analog Input 12 Bit Voltage/Current 8 Channels	IC200ALG620	Analog Input 16 Bit RTD 4 Channels	
IC200ALG261 ⁵		Analog Input 15 Bit Differential Voltage 8 Channels	IC200ALG630	Analog Input 16 Bit Thermocouple 7 Channels	
IC200ALG262 ⁵		Analog Input 15 Bit Differential Current 8 Channels			
Analog Output Modules ¹		IC200ALG320	Analog Output 12 Bit Current 4 Channels	IC200ALG326 ⁵	Analog Output 13 Bit Current 8 Channels
	IC200ALG321	Analog Output 12 Bit Voltage 0-10 V 4 Channels	IC200ALG327 ⁵	Analog Output 13 Bit Voltage 12 Channels	
	IC200ALG322	Analog Output 12 Bit Voltage ±10 V 4 Channels	IC200ALG331	Analog Output 16 Bit Voltage/Current Isolated 4 Channels	
	IC200ALG325 ⁵	Analog Output 13 Bit Voltage 8 Channels			
	IC200ALG430	Analog Mixed 12 Bit Current 4 Input / 2 Output Channels	IC200ALG432	Analog Mixed 12 Bit Voltage ±10 V 4 Input / 2 Output Channels	
Mixed Analog Modules ¹	IC200ALG431	Analog Mixed 12 Bit Voltage 0-10 V 4 Input / 2 Output Channels			
I/O Carriers	IC200CHS001	Barrier Horizontal Style	IC200CHS025	Spring Clamp Vertical Style	
	IC200CHS002	Box Horizontal Style	IC200CHS011	Non-integrated Barrier Style	
	IC200CHS003 ³	Connector Vertical Style	IC200CHS012	Non-integrated Box Style	
	IC200CHS005	Spring Clamp Horizontal Style	IC200CHS014	Integrated Box-Thermocouple Compensation	
	IC200CHS022	Box Vertical Style	IC200CHS015	Non-integrated Spring Style	
	I/O Interposing Bases	IC200CHS101	Non-integrated Box Style	IC200CHS112	Non-integrated Box Style
IC200CHS102		Non-integrated Box Style	IC200CHS211	Non-integrated Box Style	
IC200CHS111		Non-integrated Box Style	IC200CHS212	Non-integrated Box Style	
Remote I/O Units	IC200DBI001 ²	Remote I/O DeviceNet Network Interface Unit	IC200GBI001	Remote I/O Genius Network Interface Unit	
	IC200EBI001 ³	Remote I/O Ethernet Network Interface Unit	IC200PBI001	Remote I/O Profibus-DP Network Interface Unit	
Network Interface Modules ³	IC200BEM002	PLC Network Communication Profibus-DP Slave	IC200CHS006	Local Communications Carrier	
	IC200BEM103	PLC Network Communication DeviceNet (Master/Slave)	IC200CMM020	Genius Network Interface (IC200GBI001 only) Modbus Master Serial Module (one RS-485 Port)	
	IC200BEM104	PLC Network Communications AS-i Master			
Controllers	IC200CPU001	CPU 34 Kbyte Configurable Memory, Two Serial Ports (RS-232 and RS-485)	IC200CPU005	CPU with 64 Kbyte Configurable User Memory, Two Serial Ports (RS-232 and RS-485)	
	IC200CPU002	CPU 42 Kbyte Configurable Memory, Two Serial Ports (RS-232 and RS-485)	IC200CPU005	CPU with 64 Kbyte Configurable User Memory, Two Serial Ports (RS-232 and RS-485), 10 MBit Ethernet Port	
Power Supplies	IC200PWR001	Power Supply 24 VDC Input	IC200PWR201	Power Supply 12 VDC Input	
	IC200PWR002	Power Supply 24 VDC Input with Expanded 3.3 VDC	IC200PWR202	Power Supply 12 VDC Input with Expanded 3.3 VDC	
	IC200PWR101	Power Supply 120/240 VAC Input	IC200PWB001	Power Supply Booster Carrier	
	IC200PWR102	Power Supply 120/240 VAC Input with Expanded 3.3 VDC			
Accessories	IC200ACC003	EZ Program Store Flash Device for CPUs	IC200ERM001 ⁶	I/O Expansion Receiver Isolated (Up to 750 meters)	
	IC200CBL001	CPU Programming Cable (RS-232)	IC200ERM002 ⁶	I/O Expansion Receiver Non-Isolated (Up to 15 meters)	
	IC200ETM001 ⁴	I/O Expansion Transmitter for CPU and Network Interface Units	BC646MPH101	Logic Developer PDA software tool with cable adapter	

¹Requires an I/O carrier for wiring termination.

²The DeviceNet network interface unit only supports autoconfiguration of I/O. Remote I/O configuration tool will be supported in the future.

³These modules are for use in CPU systems.

⁴Refer to VersaMax Modules, Power Supplies, and Carriers Manual GFK-1504 for cables and Interposing Terminal Blocks.

⁵Includes support for EGD and Modbus Ethernet.

⁶Supported by CPUs, Genius, Profibus and Ethernet NIUs only.

GE Fanuc Intelligent Platforms Information Centers

Americas:
1 800 GE FANUC or 434 978 5100

Asia Pacific:
86 21 3222 4555

Europe, Middle East and Africa:
800 1 GE FANUC or 800 1 4332682
or 1 780 401 7717

Europe, Middle East and Africa (CNC):
352 727979 1

Additional Resources

For more information, please visit the GE Fanuc Intelligent Platforms web site at:

www.gefanuc.com

